


Encapsulated Transformer


EF-20x6mm Series

Unit : in mm

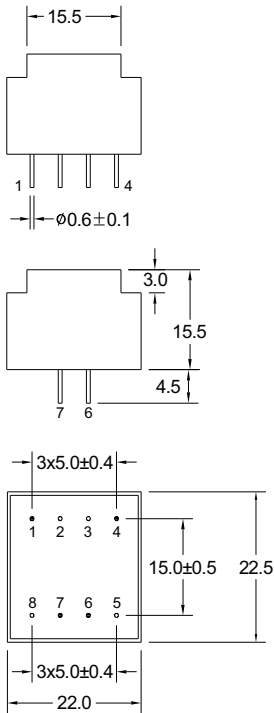

| Catalog No | Secondary | | | | | Ambient Temp. (Ta) | Approval | |
|------------|---------------|--------------|-----------------|-----------------|---------------------|--------------------|----------|----|
| | Rated Voltage | Power Rating | Loading Current | No-Load Voltage | Secondary Circuitry | | VDE | CE |
| | 6.0 V | 0.35 VA | 54 mA | 9.8 V | A | 70°C | ○ | ● |
| | 8.0 V | 0.35 VA | 44 mA | 12.0 V | A | 70°C | ○ | ● |

1) Catalog Number System :

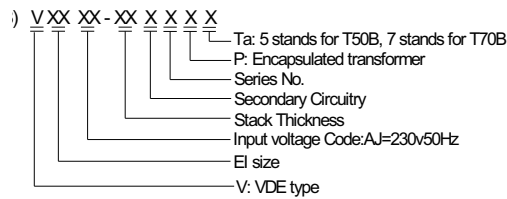

- 2) Inherently short-circuit proof safety isolating transformer
- 3) * - Inherently short-circuit proof isolating transformer
- 4) Temperature Class : B
- 5) Weight per unit : approximate 24gm
- 6) ● - Approved
- 7) ○ - Meet Standard

