

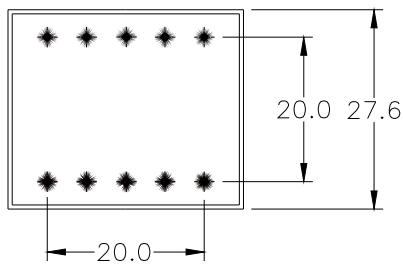



Unit: in mm



Secondary Circuitry: A



Secondary Circuitry: D




Catalog No	Secondary					Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuitry		VDE	CE
V30AJ-05A1P7	6.0 V	0.6 VA	100 mA	9.8 V	A	70°C	○	●
V30AJ-05A7P7	6.0 V	0.6 VA	100 mA	11.2 V	A	70°C	○	●
V30AJ-05A3P7	9.0 V	0.6 VA	67 mA	14.2 V	A	70°C	○	●
V30AJ-05A4P7	12.0 V	0.6 VA	50 mA	19.4 V	A	70°C	○	●
V30AJ-05A5P7	15.0 V	0.6 VA	40 mA	23.7 V	A	70°C	○	●
V30AJ-05A6P7	18.0 V	0.6 VA	33 mA	27.8 V	A	70°C	○	●
V30AJ-05A2P7	24.0 V	0.6 VA	25 mA	40.5 V	A	70°C	○	●

Catalog No	Secondary					Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuitry		VDE	CE
V30AJ-05D1P7	6.0 Vx2	0.6 VA	50 mA	10.0 Vx2	D	70°C	○	●
V30AJ-05D3P7	9.0 Vx2	0.6 VA	33 mA	14.2 Vx2	D	70°C	○	●
V30AJ-05D2P7	12.0 Vx2	0.6 VA	25 mA	20.5 Vx2	D	70°C	○	●
V30AJ-05D4P7	15.0 Vx2	0.6 VA	20 mA	24.9 Vx2	D	70°C	○	●
V30AJ-05D5P7*	18.0 Vx2	0.6 VA	17 mA	29.4 Vx2	D	70°C	○	●
V30AJ-05D6P7*	24.0 Vx2	0.6 VA	13 mA	39.1 Vx2	D	70°C	○	●

Remarks :

1) Catalog Number System :

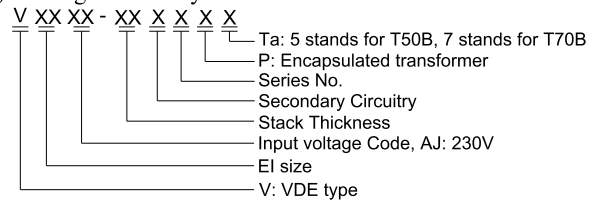

- 2) Inherently short-circuit proof safety isolating transformer
- 3) * - Non short-circuit proof isolating transformer
- 4) Temperature Class : B
- 5) Weight per unit : approximate 40gm
- 6) ● - Approved
- 7) ○ - Meet Standard