


# Encapsulated Transformer


## EI-30x15.5mm Series

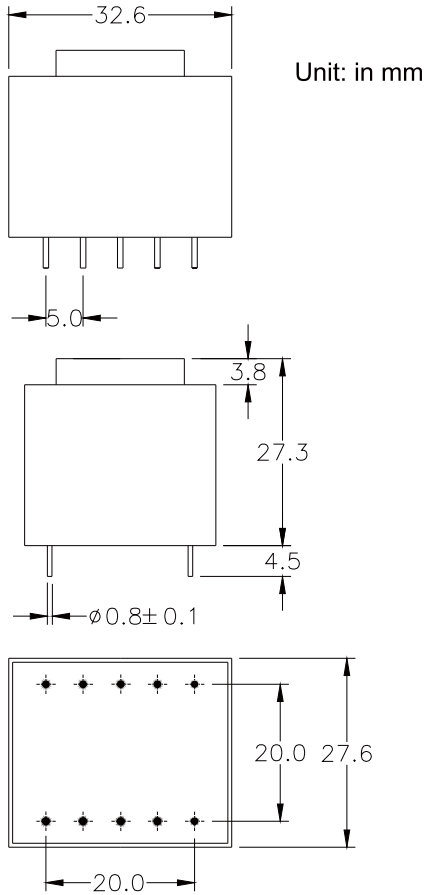

Unit: in mm


Catalog No	Secondary					Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuit		VDE	CE
V30AJ-15A8P7	6.0 V	2.0 VA	333 mA	9.5 V	A	70°C	●	●
V30AJ-15AAP5	6.0 V	2.0 VA	333 mA	10.0 V	A	50°C	●	●
V30AJ-15A1P7	6.0 V	2.1 VA	350 mA	10.4 V	A	70°C	●	●
V30AJ-15A1P5	6.0 V	2.3 VA	383 mA	10.2 V	A	50°C	●	●
V30AJ-15AAP7	7.0 V	2.0 VA	286 mA	10.7 V	A	70°C	●	●
V30AJ-15ACP7	7.5 V	2.0 VA	267 mA	11.7 V	A	70°C	●	●
V30AJ-15ADP5	7.5 V	2.0 VA	267 mA	11.6 V	A	50°C	●	●
V30AJ-15A9P7	9.0 V	2.0 VA	222 mA	15.2 V	A	70°C	●	●
V30AJ-15A9P5	9.0 V	2.0 VA	222 mA	16.5 V	A	50°C	●	●
V30AJ-15A2P7	9.0 V	2.1 VA	233 mA	15.5 V	A	70°C	●	●
V30AJ-15A2P5	9.0 V	2.3 VA	256 mA	15.3 V	A	50°C	●	●
V30AJ-15A7P5	10.0 V	2.1 VA	210 mA	15.8 V	A	50°C	●	●
V30AJ-15A8P5	12.0 V	2.0 VA	167 mA	21.0 V	A	50°C	●	●
V30AJ-15ABP7	12.0 V	2.0 VA	167 mA	18.2 V	A	70°C	●	●
V30AJ-15A3P7	12.0 V	2.1 VA	175 mA	20.7 V	A	70°C	●	●
V30AJ-15A3P5	12.0 V	2.3 VA	192 mA	20.2 V	A	50°C	●	●
V30AJ-15A7P7	15.0 V	2.0 VA	133 mA	23.5 V	A	70°C	●	●
V30AJ-15ACP5	15.0 V	2.0 VA	133 mA	23.7 V	A	50°C	●	●
V30AJ-15A4P7	15.0 V	2.1 VA	140 mA	25.8 V	A	70°C	●	●
V30AJ-15A4P5	15.0 V	2.3 VA	153 mA	24.3 V	A	50°C	●	●
V30AJ-15ADP7	18.0 V	2.0 VA	111 mA	28.5 V	A	70°C	●	●
V30AJ-15A5P7	18.0 V	2.1 VA	117 mA	30.8 V	A	70°C	●	●
V30AJ-15A5P5	18.0 V	2.3 VA	128 mA	30.7 V	A	50°C	●	●
V30AJ-15ABP5	24.0 V	2.0 VA	83 mA	36.5 V	A	50°C	●	●
V30AJ-15A6P7	24.0 V	2.1 VA	88 mA	41.4 V	A	70°C	●	●
V30AJ-15A6P5	24.0 V	2.3 VA	96 mA	42.2 V	A	50°C	●	●

Catalog No	Secondary					Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuit		VDE	CE
V30AJ-15D9P5	6.0 Vx2	2.0 VA	167 mA	10.0 Vx2	D	50°C	●	●
V30AJ-15D1P7	6.0 Vx2	2.1 VA	175 mA	10.4 Vx2	D	70°C	●	●
V30AJ-15D1P5	6.0 Vx2	2.3 VA	192 mA	10.1 Vx2	D	50°C	●	●
V30AJ-15D8P5	9.0 Vx2	2.0 VA	111 mA	15.0 Vx2	D	50°C	●	●
V30AJ-15D2P7	9.0 Vx2	2.1 VA	117 mA	15.4 Vx2	D	70°C	●	●
V30AJ-15D2P5	9.0 Vx2	2.3 VA	128 mA	15.4 Vx2	D	50°C	●	●
V30AJ-15D7P5	12.0 Vx2	2.0 VA	83 mA	21.0 Vx2	D	50°C	●	●
V30AJ-15D3P7	12.0 Vx2	2.1 VA	88 mA	20.7 Vx2	D	70°C	●	●
V30AJ-15D3P5	12.0 Vx2	2.3 VA	96 mA	21.1 Vx2	D	50°C	●	●
V30AJ-15DAP5	15.0 Vx2	2.0 VA	67 mA	24.4 Vx2	D	50°C	●	●
V30AJ-15D4P7	15.0 Vx2	2.1 VA	70 mA	24.8 Vx2	D	70°C	●	●
V30AJ-15D4P5	15.0 Vx2	2.3 VA	77 mA	24.4 Vx2	D	50°C	●	●
V30AJ-15D5P7*	18.0 Vx2	2.1 VA	58 mA	30.8 Vx2	D	70°C	○	●
V30AJ-15D5P5*	18.0 Vx2	2.3 VA	64 mA	31.0 Vx2	D	50°C	●	●
V30AJ-15D6P7*	24.0 Vx2	2.1 VA	44 mA	41.4 Vx2	D	70°C	○	●
V30AJ-15D6P5*	24.0 Vx2	2.3 VA	48 mA	42.0 Vx2	D	50°C	○	●

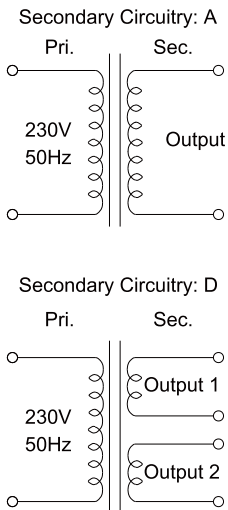

### Remarks :

#### 1) Catalog Number System :

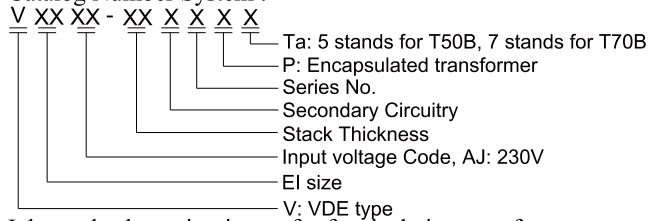

- 2) Inherently short-circuit proof safety isolating transformer
- 3) \* - Non short-circuit proof isolating transformer
- 4) Temperature Class : B
- 5) Weight per unit : approximate 100gm
- 6) ● - Approved
- 7) ○ - Meet Standard