


SIZE EFD30 · OUTPUT : 35W

Primary / Secondary Insulation $\geq 2000\text{Vac}$

Ambient temperature $< 60^\circ\text{C}$

Construction conforms to IEC950,IEC335,IEC61558 for reinforced insulation

Exclusively uses UL94-V0 listed materials

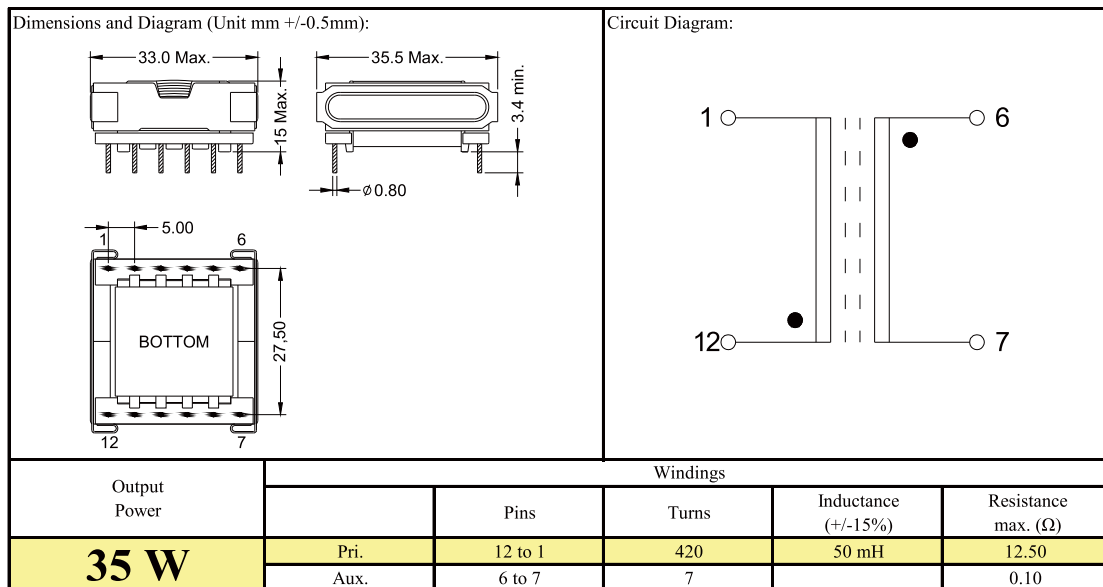

SIZE PQ20/20 · OUTPUT : 30W

Primary / Secondary Insulation $\geq 2000\text{Vac}$

Ambient temperature $< 60^\circ\text{C}$

Construction conforms to IEC950,IEC335,IEC61558 for reinforced insulation

Exclusively uses UL94-V0 listed materials

